

Millimeter-Wave Radar Cloud Measurements and Data Analysis for Satellite Validation

Stephen M. Sekelsky

**Microwave Remote Sensing Laboratory
University of Massachusetts
Amherst, MA 01002**

31 May 1998

Final Report

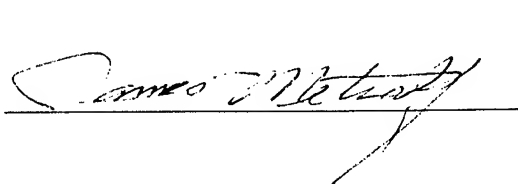
APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.




**AIR FORCE RESEARCH LABORATORY
Space Vehicles Directorate
29 Randolph Rd
AIR FORCE MATERIEL COMMAND
Hanscom AFB, MA 01731-3010**

20020129 095

This technical report has been reviewed and is approved for publication.

Handwritten signature of James M. [unclear] in cursive script, underlined.

Handwritten signature of Robert F. [unclear] in cursive script, underlined.

This report has been reviewed by the ESC Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS).

Qualified requestors may obtain additional copies from the Defense Technical Information Center (DTIC). All others should apply to the National Technical Information Service (NTIS).

If your address has changed, if you wish to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify AFRL/VSIM, 29 Randolph Road, Hanscom AFB MA 01731-3010. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document require that it be returned.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 31 May 1998		3. REPORT TYPE AND DATES COVERED Final, 29 Aug 1996-30 Sept 1997
4. TITLE AND SUBTITLE Millimeter-Wave Radar Cloud Measurements and Data Analysis for Satellite Validation			5. FUNDING NUMBERS C: F19628-96-C-0146 JON: smcp96ma	
6. AUTHOR(S) Stephen M. Sekelsky				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Microwave Remote Sensing Laboratory University of Massachusetts Amherst MA 01002			8. PERFORMING ORGANIZATION REPORT NUMBER None	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory/VSBE 29 Randolph Rd. Hanscom AFB MA 01731-3010			10. SPONSORING/MONITORING AGENCY REPORT NUMBER AFRL-VS-TR-2001-1665	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release: distribution unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The University of Massachusetts operated a Cloud Profiling Radar System in Everglades City, Fla., for three weeks during September 1996. On-site calibration of the radar was performed with a trihedral corner reflector. Time-height measurements of reflectivity, Doppler mean velocity, Doppler velocity variance, and linear depolarization ratio were assembled into netCDF datafiles for further analysis and comparison with data from other sensors. The data were archived in the Phillips Laboratory Data Archive Center and were made available through the Worldwide Web on a university web site.				
14. SUBJECT TERMS Millimeter-wave radar, cloud physics, radar calibration			15. NUMBER OF PAGES 3	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT Unlimited	

FINAL REPORT

March, 1996 - June, 1997

**Millimeter-wave Radar Cloud Measurements
and Data Analysis for Satellite Validation**

Contract No. F19628-96-C-0146

Stephen M. Sekelsky

**Microwave Remote Sensing Laboratory (MIRSL)
University of Massachusetts, Amherst, MA 01003**

1 INTRODUCTION

This final report details work completed by the University of Massachusetts Microwave Remote Sensing Laboratory (MIRSL) during the period from July 1, 1997 through September 30, 1997 under Contract F19628-96-C-0146. We also review the original tasks to be performed. This Contract supports data collection and analysis by the MIRSL Cloud Profiling Radar System (CPRS) in support of the SBIRS program.

2 REVIEW OF ACCOMPLISHMENTS

The work to be performed as originally stated in our proposal is listed below and broken up into measurement and analysis tasks.

ORIGINAL LIST OF TASKS TO BE PERFORMED:

1. Data Collection:

- (a) Deploy and operate UMass Cloud Profiling Radar System (CPRS) in Key West, Florida for 2-3 weeks in September, 1996.
- (b) Perform on-site calibration via trihedral 'corner' reflector to calibrate CPRS reflectivity measurements.
- (c) Generate netCDF format computer files of data products collected, such as reflectivity, mean velocity, Doppler variance, linear depolarization ratio (LDR), etc.
- (d) Generate netCDF format computer files of additional data products that might be collected as requested by Phillips laboratory.

2. Data Analysis:

- (a) Assemble time-height and three-dimensional measurements into netCDF datafiles with convenient dimensions for further analysis and comparison with data from other sensors, such as the VIL and HSRL lidars.
- (b) Comprehensive comparison between radar reflectivity, HSRL lidar optical depth measurements and other data such as soundings and in situ aircraft cloud microphysical measurements. Relationships between radar data and optical depth will be reported to Phillips Laboratory in the form of a technical report so that they may be used with Phillips Lab's TPQ-11 radar.
- (c) Three-dimensional radar data will be converted to optical depths and cloud top maps. This data will be recorded in netCDF format and provided to Phillips lab via ftp or one of several magnetic tape formats.

All measurement tasks listed above have been accomplished. Aside from relocation of the measurement site from Key West, FL to Everglades City, FL the work performed is that stated above. 1996. The data has been archived in the Phillips Laboratory Data Archive Center (PDAC) and is also accessible via the World Wide Web at <http://abyss.ecs.umass.edu/cprs-web>.

Item (a) of the analysis tasks has been completed. Items (b) and (c) have not been completed since little quantitative HSRL data from the Everglades City Data collection is available from the University of Wisconsin. The original intent of our analysis was to estimate optical depth, τ , from radar reflectivities by comparison with University of Wisconsin High Spectral Resolution Lidar (HSRL) data. The meat of this analysis was to determine empirical relationships between lidar optical depth and radar backscatter. This would 'calibrate' the relationship between radar reflectivity and optical depth and permit optical depth estimation in optically thick clouds and precipitating clouds where lidar-derived optical depths are unavailable due to high extinction rates. Once this was accomplished application of these relationships was to be automated and applied to all measured data.

There are other interesting possibilities for estimating cloud optical depth, however this goes beyond the scope of our original proposal. Our Third Quarterly report explained how optical depth could be estimated using existing statistical relationships between ice mass content (IMC) and radar reflectivity. IMC is integrated vertically and multiplied by a cloud heating rate to derive cloud optical depth. It is difficult to place error bars on the optical depth estimates that result from this procedure because of the assumptions made. The only reliable method for reducing these uncertainties is direct comparison with optical depths measured by lidar. Without this 'calibration' optical depths derived by the method described above can be off by up to two orders of magnitude. The absolute error increases with radar reflectivity.